

MOTION CONTROLLERS



Rev. b, March 2018

OFFERING HIGH PERFORMANCE MOTION
CONTROL FOR DEMANDING HYDRAULIC AND
ELECTRIC APPLICATIONS

Whenever the highest levels of motion control performance and design flexibility are required, you'll find Moog expertise at work. Through collaboration, creativity and world-class technological solutions, we help you overcome your toughest engineering obstacles, enhance your machine's performance and help take your thinking further than you ever thought possible.

TABLE OF CONTENTS

Product Overview.....	3
Features and Benefits	4
MSC III Motion Controller.....	5
Overview	5
Interfaces	5
Technical data.....	6
MASS Moog Application Software Suite	11
General	11
Programming Languages.....	12
Functionality of MASS	13
Modules.....	14
License Key	15
Ordering Information	16

Product Overview




Moog offers a variety of freely programmable motion controllers, each of them designed with specialized functionality to meet a range of customer requirements. Regardless of your application, we have a motion controller that will meet your requirements.

MSC III Motion Controller

The MSC III Motion Controller is a high performance motion controller with PLC functionality that is ideal for complex centralized and decentralized applications.

The MSC III Motion Controller offers several fieldbus interfaces, high resolution analog inputs/outputs, position sensor interfaces and digital inputs/outputs.

It is designed for fast and accurate closed-loop control of multiple hydraulic and electric actuators.

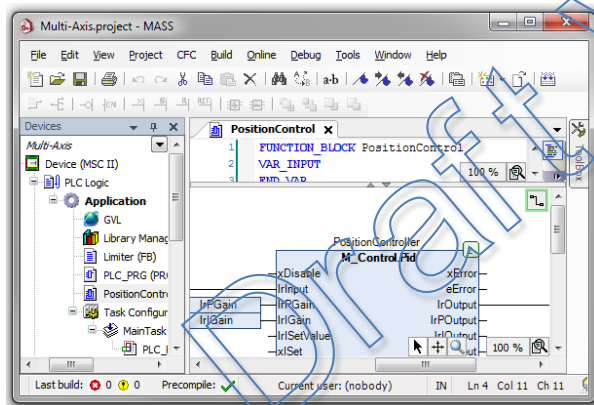

MASS (Moog Application Software Suite)

IEC 61131-3 integrated development environment based on CODESYS 3.

MASS offers full programming, debugging, simulation, parameterization, visualization and tracing capabilities.

It helps you to enhanced machine performance via special Moog libraries of pre-programmed function blocks and enables users to solve advanced control problems.

MASS is designed to improve machine control by providing powerful, advanced capabilities for closed-loop and open-loop control as well as PLC functionality.

Features and Benefits

Feature	Benefit
Short cycle times	Higher machine productivity
Easy-to-use software and flexible hardware	Fast start-up commissioning
Support of user-defined open control structures	Maximum flexibility
Special Moog libraries of pre-programmed function blocks	Solve advanced control problems quickly
Multiple connectivity options	Quick integration
Remote servicing and debugging	Convenience

Draft Version

MSC III Motion Controller

Overview

The MSC III Motion Controller is a freely programmable multi-axis motion controller that facilitates rapid and precise control of process variables such as position, speed, and force. It is suitable for use with both hydraulic and electric motion control.

Interfaces

USB interfaces

Dot matrix display
with push buttons

CAN

PROFIBUS-DP

LAN

EtherCAT master

Real-time Ethernet slave

Analog inputs/outputs

Position sensor interfaces


Digital inputs/outputs and
power supply



Technical data

Designation	MSC III Motion Controller
Ordering number	D136-004-001
Integrated Interfaces	
Ethernet	1
EtherCAT master	2
Real-time Ethernet slave	2
CAN/CANopen	1
PROFIBUS-DP slave	1
USB	2
Processor	1000 MHz
Type	i.MX6 Quad core CPU
Flash EEPROM	1 GB
RAM	1 GB
NV RAM for retain variables	32 KB
Data maintenance	>10 years
General technical data	
Connection technique	Plug-in terminal strips with push-in spring connection
Mounting	On backing plate (DIN rail mounting kit available as accessory)
Dimensions W x D x H	94.2 x 202 x 220 mm (3.71 x 7.95 x 8.66 in)
Operating temperature range	+5 to +55°C (+41 to +131°F)
Maximum mean temperature in operation for 24 hours	+50°C (+122°F)
Storage temperature range (in original packaging)	-25 to +70°C (-13 to 158°F)
relative air humidity	10 to 95 % (non-condensing)
Maximum operation height	2,000 m (6,500 ft)
Maximum storage height	3,000 m (9,800 ft)
Air pressure for transportation	≥ 70 kPa (corresponds to an elevation of ≤ 3,000 m (9,800 ft))
Protection class	III
Degree of protection	IP20

Dimensions

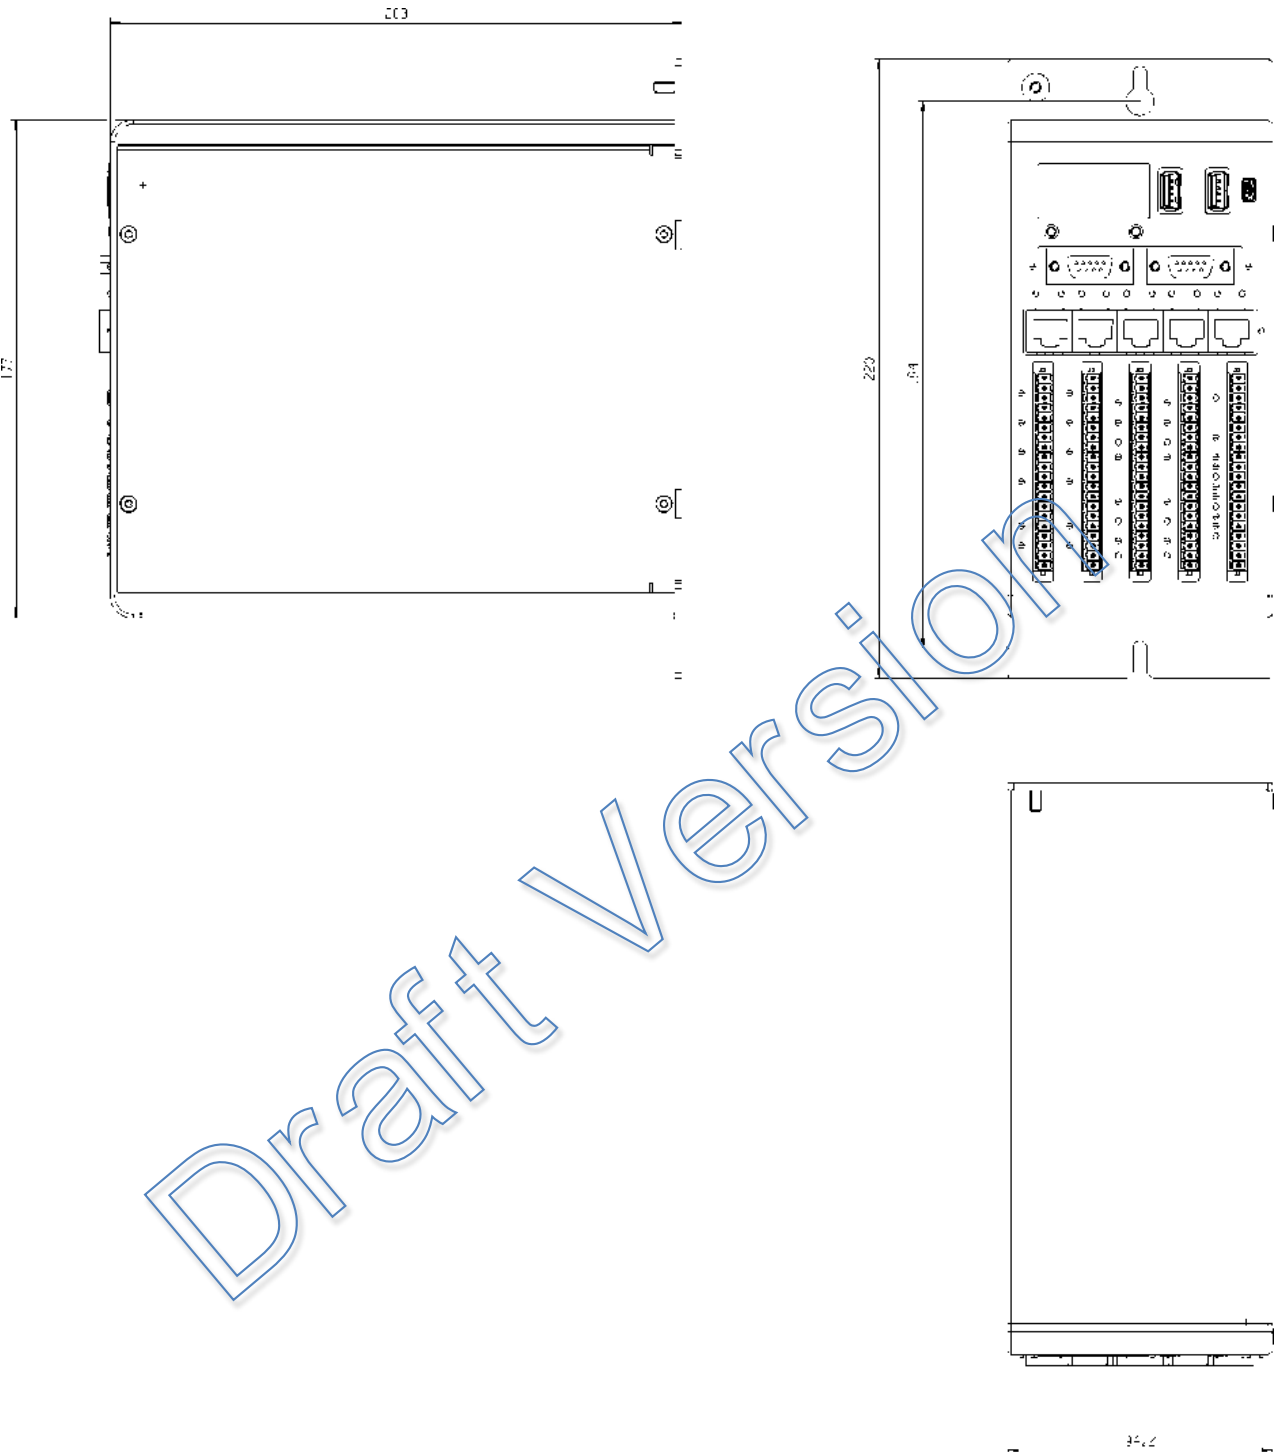


Standards	
Operating equipment requirements and tests	IEC 61131-2
EMC emission standard for industrial equipment	EN 61000-6-4
EMC immunity standard for industrial equipment	EN 61000-6-2
Shock resistance	IEC 60068-2-27
Vibration resistance	IEC 60068-2-6
Insulation strength	IEC 61131-2, test voltage 500 V DC
Power supply	
Voltage supply of module electronics	24 VDC (18 to 36 V), SELV according to EN 60950-1
Current consumption of module electronics	
Idling	0.7 A
Full load	2 A
Potential separation	Separate potentials for: • Ethernet • CAN/CANopen • PROFIBUS-DP slave • Analog inputs/outputs • Digital inputs/outputs
Internal voltages	Generated via internal DC/DC converters
Behavior at voltage failure/cut-off of supply voltage	Necessary data is permanently stored. If the supply voltage falls (<18 V), buffer capacitors provide the necessary energy.
Display	
Display type	Dot matrix display with 2 push buttons
Real-time clock	
Real-time clock	Real-time clock buffered by internal capacitor
Interfaces	
Ethernet	100/1000 MBit/s with 8-pole RJ45 connector (100/1000Base-T)
EtherCAT master	2 x 100 MBit/s interfaces
Real-time Ethernet slave	2 x Real-time Ethernet fieldbus slave interfaces with RJ45 connectors
CAN/CANopen	CAN interfaces, transmission rate adjustable from 10 kBit/s to 1 MBit/s
PROFIBUS-DP slave	Maximum 12 MBit/s
USB	2 x USB 2.0 host, USB-A connectors

Digital inputs/outputs	
Type of digital inputs	Type 1 (current consuming) according to IEC 61131-2
Number of digital inputs/outputs	8
Configuration	Individually configurable as input or output
Voltage supply 24 VDC	(18 to 36 V), SELV according to EN 60950-1
Maximum current capacity of single output	0.5 A
Protection	
Sustained short-circuit	Yes
Thermal overload	Yes
Overvoltage	Up to ± 36 V
Analog inputs/outputs	
Voltage supply	Via internal DC/DC converter
Analog inputs	
Type	Each analog input is configurable as ± 10 V, ± 10 mA or 4 to 20 mA.
Number	8
Resolution	16 Bit
Overvoltage protection	Up to ± 36 V
Analog outputs	
Type	Each analog output is configurable as ± 10 V, ± 10 mA, ± 20 mA or 4 to 20 mA.
Number	4
Resolution	16 Bit
Protection	
Short-circuit	Yes
Overvoltage	Up to ± 36 V
Reference voltage output	
Reference output voltage	+10 VDC
Maximum current	5 mA
Protection	
Short-circuit	Yes
Overvoltage	Up to ± 36 V
Sensor interfaces	
Number of sensor interfaces	4
Type of signal	Corresponding to EIA-422 with protection against 24 V
Wire fault monitoring	Inputs
Configuration	Each sensor configurable as incremental encoder or SSI
Incremental encoder interface	
Maximum pulse frequency	8 MHz
Edge evaluation of incremental encoders	4-edge evaluation
SSI interface	
SSI sensor master or slave data format	Gray or binary
Data bits	Up to 32 bit data including diagnostic information
Transmission frequency	78 kHz to 5 MHz

Diagnostics	
Watchdog output: Outputs enabled signal	Analog and digital outputs in operation. In the event of a fault, the analog, digital and position sensor outputs are switched off (high impedance state) Also the Outputs enabled signal is switched off (high impedance state).

Draft Version

MASS Moog Application Software Suite

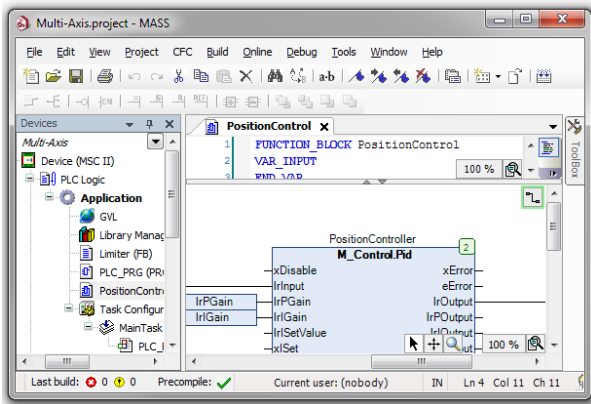

General

The Moog Axis Application Software Suite (MASS) offers a state-of-the-art development environment for implementing demanding motion control functions using the IEC 61131 standard for development.

MASS includes tools for:

- Programming
- Testing and optimizing
- Debugging
- Documentation
- Visualization
- Configuration

Interfaces

- Ethernet (TCP/IP and UDP/IP)
- EtherCAT
- CAN/CANopen
- PROFIBUS-DP

Features

Extensive libraries with Moog function blocks, based on 50 years of experience in electric and hydraulic motion control.


- Freely programmable controller structures
- Maximum flexibility by offering a complete scope of functions in all IEC 61131 programming languages
- Simultaneous realization of control, regulation and PLC applications in one application program
- Open standard interfaces for communication on machine and process levels

Benefits


- Quick project realization
- Low programming efforts
- One tool for programming, visualizing and documentation

Programming Languages


- All IEC 61131 programming languages and CFC (Continuous Function Chart)
- Full scope of functionality in all programming languages, provides maximum flexibility in creation of user programs
- Each module can sequence other modules regardless of their programming language

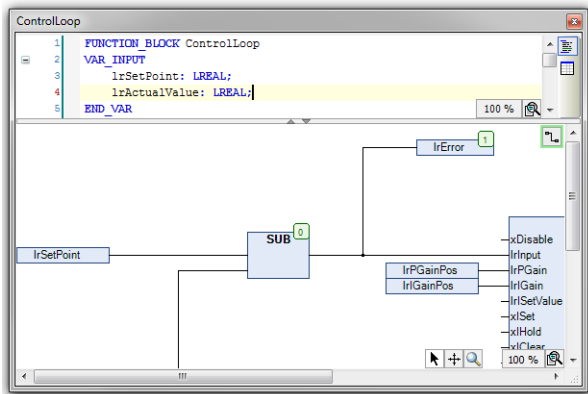

Continuous Function Chart (CFC)

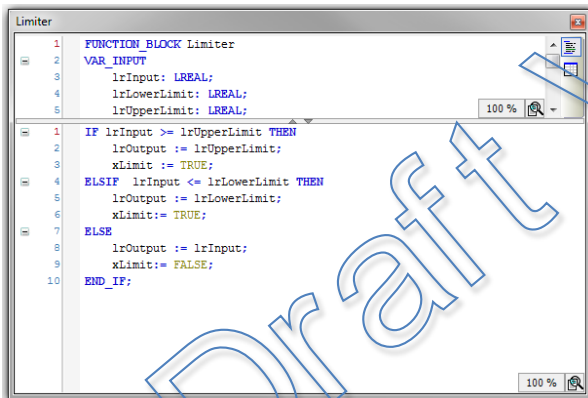


Structured Text (ST)

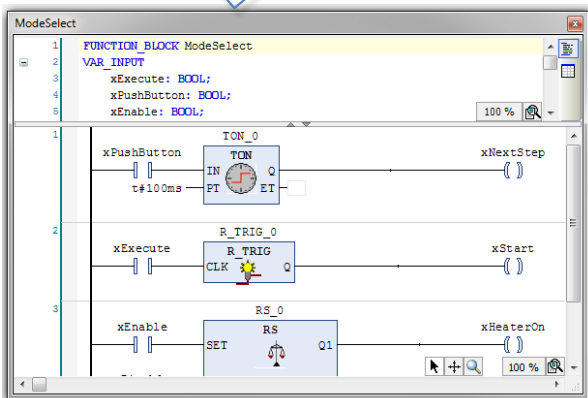


Ladder Diagram (LD)

Editors

- Context-sensitive input help
- Automatic formatting
- Context menus in all editors
- Syntax coloring
- Multi-level undo/redo
- Display of the current values of all variables in online operation

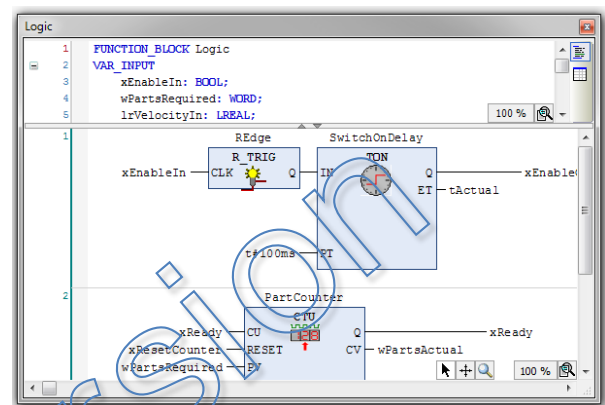

Function Block Diagram (FBD)

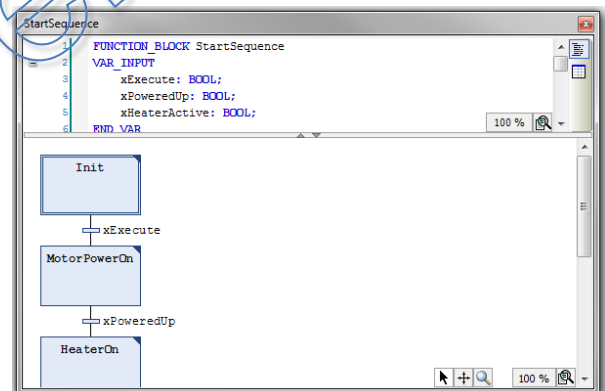


Sequential Function Chart (SFC)

Functionality of MASS

MASS is based on CODESYS 3 which is the standard for IEC 61131 programming. It has been enhanced by Moog by adding motion control functionality. In this way, even complex automation projects can be simplified. MASS includes the following functionality:

Motion control technology

- Controller: I, D, PID standard/extended
- Filter: High-pass, low-pass, notch
- Non-linear functions: Dead band, nonlinear, dual-gain, look-up table
- Simulation of the process: PT1, PT2
- Function generator
- Signal delay
- Counter
- Timer
- Transfer functions: Continuous, time discrete

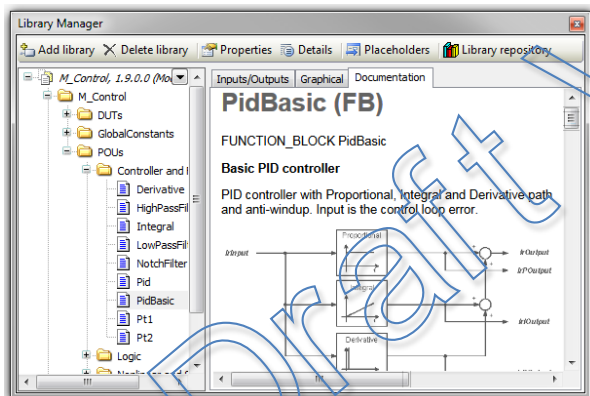

Hardware

- Signal conditioning for analog inputs/outputs and position sensors
- Diagnostics wire fault, power fault etc.
- Time evaluation
- Watchdog

Communication

Graphical configurator for:

- EtherCAT master
- CAN open master
- CAN open slave
- PROFIBUS-DP slave


Visualization

- Web based visualization: MASS visualization pages can be displayed on a web browser
- Support of CODESYS HMI

Modules


Visualization

- Commissioning tool
- Creation of visualizations for end users

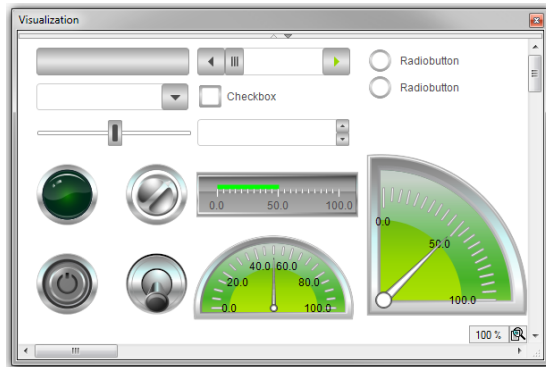


Oscilloscope

- Recording of multiple channels
- Various triggering possibilities

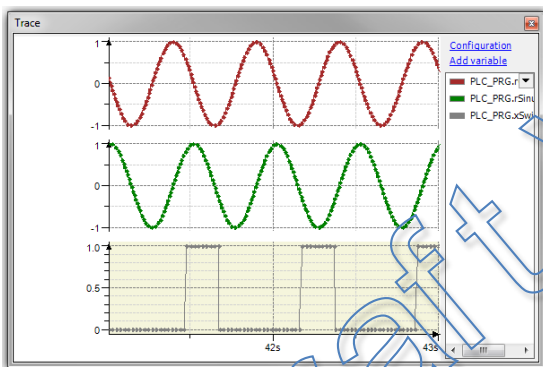


Debugging

- Break points
- Single step/single cycle
- Writing and forcing of variables
- Simulation possible without hardware
- Display of all the current values

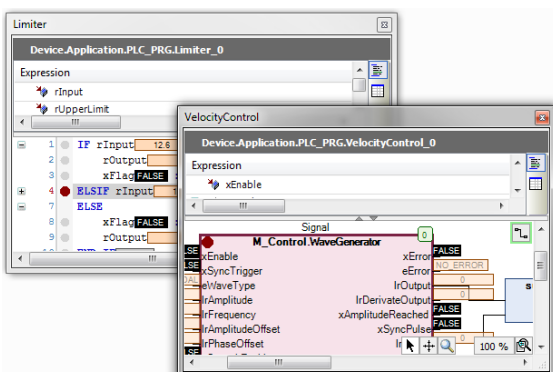


Hardware Configuration

- Configuration of all modules on one screen

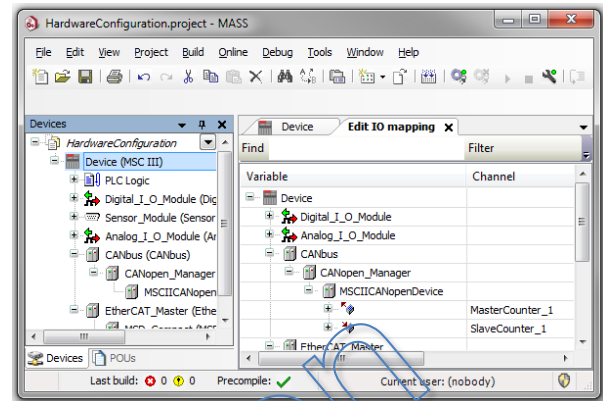

Task Configuration

- Enables division of the application program into a number of tasks
- Schedule tasks optionally time-based (cyclic) or event-triggered
- Priority and time base of each task adjustable

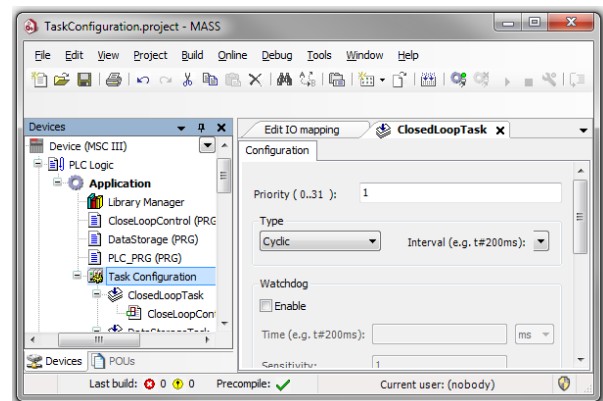

License Key

The license key of the MSC III Motion Controller contains the runtime license for the Moog Application Software Suite (MASS). Plug the license key to a USB connector of the MSC III. According to the license key used, assigned functionality of MASS is enabled for usage.

Designation	Description	Ordering number
License key 'White'	MASS runtime license with basic functionality: • Moog control technology library	D138-030-001
License key 'Green'	All functions of license key 'White' and additionally: • EtherCAT • CANopen • PROFIBUS-DP slave • Web visualization	D138-030-002
License key 'Black'	All functions of license key 'Green' and additionally: • Generation of motion profiles, coming, gearing: Soft motion	D138-030-003
License key 'Red'	Program parts and/or complete application programs specifically upon customer request	Specific to the order

Ordering Information

Designation	Description	Ordering number
MSC III Motion Controller	MSC III with 1x LAN, 2x EtherCAT master, 2x real-time Ethernet slave, 1x CAN, 2x USB, 1x PROFIBUS-DP slave, 4 x position sensor, 8 x analog input, 4 x analog output	D136-004-001
DIN rail mounting kit	For mounting the MSC III on a DIN top hat rail. To be screwed onto the back plate of the MSC III.	CC39899-001
Terminal connector	Plug component, number of positions: 20, pitch: 3.5 mm, color: gray, 5 terminal connectors are required for a MSC III. Phoenix FMC 1,5/20-STZ4-3,5 RF GY- 1702670	CC44534-020
MASS Software Development Suite (Company/Subsidiary multiuser license)	This multi user license is valid for all users in one company at one location/site. Companies with multiple subsidiaries/sites need to purchase a multi user license per subsidiary/site. The software suite allows developing, debugging, visualizing and optimizing complex motion control applications. The package includes CODESYS 3 and allows IEC 61131 compliant programming in all IEC 61131 languages. One year MASS Software Maintenance Agreement (D138-020-001) is already included which includes priority hotline support and free MASS software updates for one year. IMPORTANT! Registration of the MASS Software Maintenance Agreement is necessary at MASS-support@moog.com to receive the software updates.	D138-010-001
MASS Software Maintenance agreement (Company/Subsidiary software maintenance agreement)	This maintenance agreement is valid for all users in one company at one location/site. Companies with multiple subsidiaries/sites need to purchase a multi user maintenance agreement per subsidiary/site. Renewing the MASS Software Maintenance Agreement needs to be done by the user. It can also be renewed in advance of the maintenance agreement expiration. It includes priority hotline support (email & phone) and free MASS software updates for one year. IMPORTANT!: Registration of the MASS Software Maintenance Agreement is necessary at MASS-support@moog.com to receive the software updates.	D138-020-001

MORE PRODUCTS. MORE SUPPORT.

Moog designs a range of motion control products to complement those featured in this document. Moog also provides service and support for all of our products. For more information, contact the Moog facility closest to you.

Australia
+61 3 9561 6044
Service + 61 3 8545 2140
info.australia@moog.com
service.australia@moog.com

Brazil
+55 11 3572 0400
info.brazil@moog.com
service.brazil@moog.com

Canada
+1 716 652 2000
info.canada@moog.com

China
+86 21 2893 1600
Service +86 21 2893 1626
info.china@moog.com

France
+33 1 4560 7000
Service +33 1 4560 7015
info.france@moog.com
service.france@moog.com

Germany
+49 7031 622 0
Service +49 7031 622 197
info.germany@moog.com
service.germany@moog.com

Hong Kong
+852 2 635 3200
info.hongkong@moog.com

India
+91 80 4057 6666
Service +91 80 4057 6604
info.india@moog.com
service.india@moog.com

Ireland
+353 21 451 9000
info.ireland@moog.com

Italy
+39 0332 421 111
Service 800 815 692
info.italy@moog.com
service.italy@moog.com

Japan
+81 46 355 3767
info.japan@moog.com
service.japan@moog.com

Korea
+82 31 764 6711
info.korea@moog.com
service.korea@moog.com

Luxembourg
+352 40 46 401
info.luxembourg@moog.com

Russia
+7 8 31 713 1811
Service +7 8 31 764 5540
info.russia@moog.com
service.russia@moog.com

Singapore
+65 677 36238
Service +65 651 37889
info.singapore@moog.com
service.singapore@moog.com

South Africa
+27 12 653 6768
info.southafrica@moog.com

Spain
+34 902 133 240
info.spain@moog.com

Sweden
+46 31 680 060
info.sweden@moog.com

Turkey
+90 216 663 6020
info.turkey@moog.com

United Kingdom
+44 (0) 1684 858000
Service +44 (0) 1684 278369
info.uk@moog.com
service.uk@moog.com

USA
+1 716 652 2000
info.usa@moog.com
service.usa@moog.com

For product information, visit www.moog.com/industrial

For service information, visit www.moogglobalsupport.com

Moog is a registered trademark of Moog Inc. and its subsidiaries.
All trademarks as indicated herein are the property of Moog Inc.
and its subsidiaries.

© 2018 Moog. All rights reserved. All changes are reserved

Moog Motion Controller

Moog /PDF/Rev b, March 2018, Id. CDxxxx-en